




PET polyester acoustic wall panel

PET polyester acoustic wall panel range is a high sound absorbing wall panel designed to control echo and reverberation in areas with hard surfaces. Our acoustic Wall Panels improve the quality of the environment due to the products ability to absorb noise.

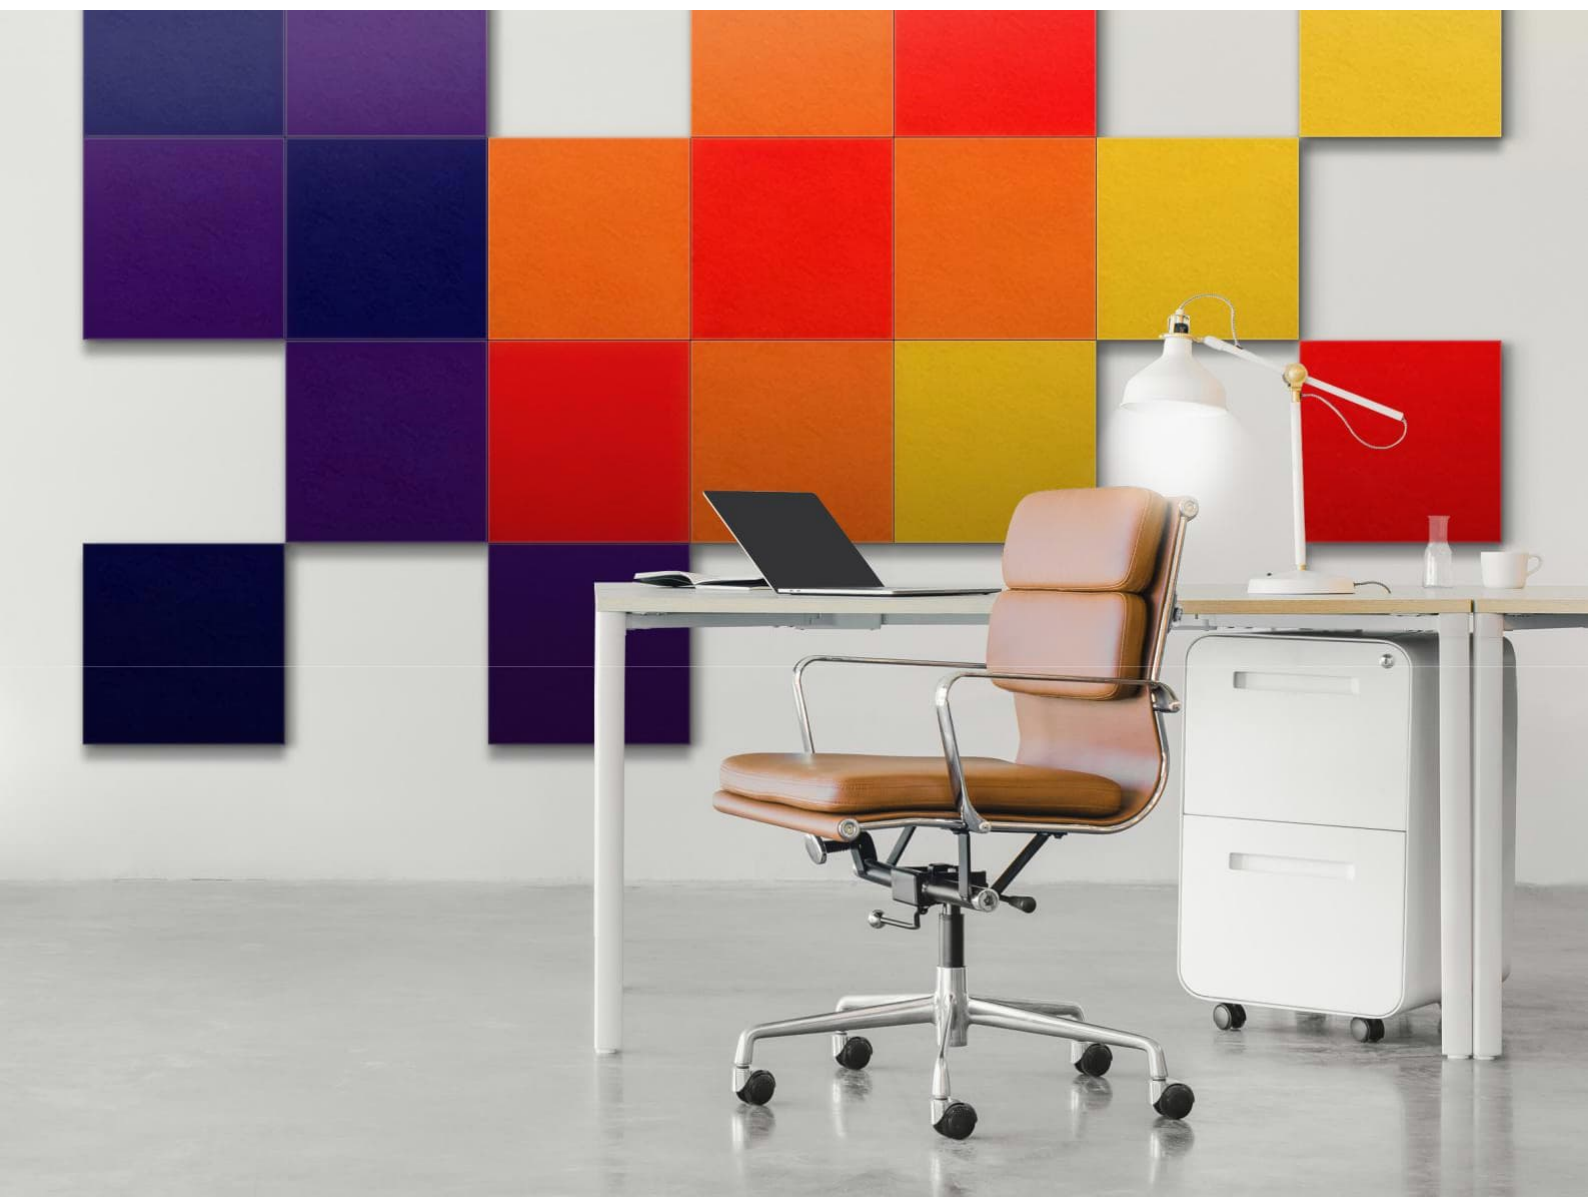

Advantages

- Outstanding sound absorption performance
- Class A
- Over 100 standard fabric colours available
- Impact resistant
- High content of recycled material
- Easy installation method
- Quick availability

PET polyester acoustic wall panel range is a high sound absorbing wall panel designed to control echo and reverberation in areas with hard surfaces. Our acoustic Wall Panels improve the quality of the environment due to the products ability to absorb unwanted sound.

Technical Information

Acoustic Absorber - PET polyester acoustic wall panel - 12 & 24mm							
Frequency (Hz)	125	250	500	1000	2000	4000	NRC
PET Wall Panels™ 12mm	0.40	0.85	1.00	0.96	1.00	1.00	0.95
PET Wall Panels™ 24mm	0.45	0.85	1.00	1.00	1.00	1.00	1.00

Cleaning

Light dirt marks may be removed by using a moist cloth. A small area should be tested before doing the rest of the area to ensure that the surface is not adversely affected.

Weight

Our Silente Wall Panels™ Acoustic panels weigh in at 4.5kg/m².

Note: All weights are given as approximations.

Fire

Our Silente Acoustic Wall Panel™ has been tested to EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements—Part 1: Classification using data from reaction to fire tests, Class B.

Cutting

PET polyester acoustic wall panel can be cut with a sharp Stanley knife

Our wall panels absorb sound to eliminate unwanted sound around the working environment.


PET polyester acoustic wall panel core material is a compressed polyester manufactured using post-consumer recycled polyester from plastic bottles. Our Wall panels have been designed to a very specific density to achieve the correct acoustic performance and are available in 12 & 24mm thickness, and in 16 different colours.



Polyester Colour Range




Charcoal Grey



Dark Grey



Stone Grey



Light Grey



Dark Blue



Navy



Light Blue



Cyan



Orange



Yellow



Black



White



Ivory



Red



Purple



Green



Pink



Preferred Contracts Limited Acoustics and Design
Belfry House, Bell Lane, Hertford, Herts, SG14 1BP
T: +44 (0) 1992 893375

E: info@preferredcontracts.com

www.preferredacoustics.com
www.preferredcontracts.com